

# ARCHED DRIP EDGE & ARCHED COPING



525 Morley Drive  
Saginaw, MI 48601  
Ph: (800) 248-0280  
Fx: (800) 432-9331



831 Morley Drive  
Saginaw, MI 48601  
Ph: (800) 248-0280  
Fx: (989) 753-7073

Date: \_\_\_\_\_

Status:  Quote  Order



Ordered By: \_\_\_\_\_ Acct. # \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Address: \_\_\_\_\_  
 City: \_\_\_\_\_ St: \_\_\_\_\_ Zip \_\_\_\_\_  
 Phone #: \_\_\_\_\_ Fax: \_\_\_\_\_  
 Special Instructions: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Job Name: \_\_\_\_\_  
 Address: \_\_\_\_\_  
 City: \_\_\_\_\_ St \_\_\_\_\_ Zip \_\_\_\_\_  
 P.O. #: \_\_\_\_\_ Ship Via: \_\_\_\_\_  
 Original Order # : \_\_\_\_\_  
 Ship To:  Contractor Location  Jobsite  
 Other (provide address below)  
 \_\_\_\_\_

Provide radius (A.) when possible along with the following measurements:

- Total arch length is required. (B.) **Fig. 1.1**
- Measure the entire width of the arch (cord length). If the entire cord length cannot be measured specify the cord length used.(C.)**Fig. 1.1**
- H or height. (D.) **Fig. 1.1**

Note: When the entire width of the arch is not measured verify the height measurement in several locations using the same cord length.

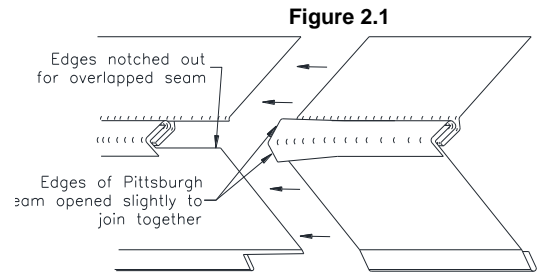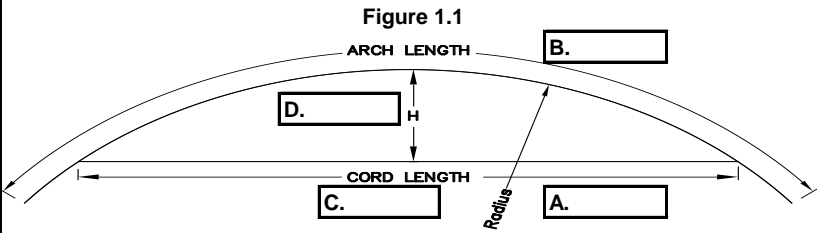


The ends of each arched piece are pre-notched to fit together in the field. **Fig. 2.1**

**Fabrication will proceed only after receipt of the signed approval package that will be sent to you.**

**ARCHED DRIP EDGE:**


Available face sizes of 2-6" \*




Splice Cleat

**Roof flange (vinyl coated) :**

White	<input type="checkbox"/>
Tan	<input type="checkbox"/>
Gray	<input type="checkbox"/>
Dark gray	<input type="checkbox"/>



FACE



**Face material type:**

24ga. Kynar 500

24ga. Bonderized

**Face color:** \_\_\_\_\_


\* 4" or larger face size require splice cleats 24" o.c.

\*This edge detail has not been tested to ES-1 standards and may not be compliant with certain specifications.


**ARCHED COPING:**

Note: Order this 1/4" wider than the wall

Available face and back sizes of 2-6" \*  
 Provide - Face (A.), Top (B.), Back (C.)




Splice Cleat




FACE SIZE

A.



TOP

B.

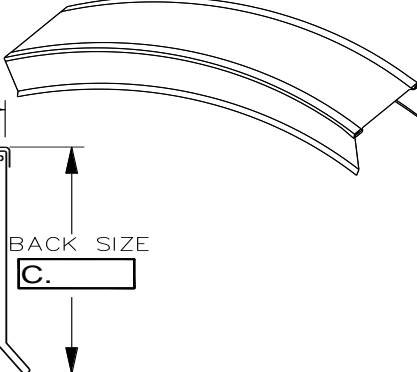

BACK SIZE

C.

**Face material type:**

24ga. Kynar 500

24ga. Bonderized

**Face color:** \_\_\_\_\_

\* 4" or larger face size require splice cleats 24" o.c.

\*This edge detail has not been tested to ES-1 standards and may not be compliant with certain specifications.